

ILUMINARC

Sense. Sight. Soul.


ILUMINARC

Illuminarc inspires and empowers architects, designers and system integrators to visually enhance man-made and natural environments through the artistic use of energy efficient lighting. To that end, we develop viable technologies, luminaires and control systems that solve installation challenges and facilitate the execution, operation and maintenance of remarkable and efficient lighting projects. Thank you for considering Illuminarc for your current and future projects.

EXTERIOR SOLUTIONS

COLORIST POD.....	137
COLORIST LINE	138
COLORIST PANEL	139

IALDLIRC

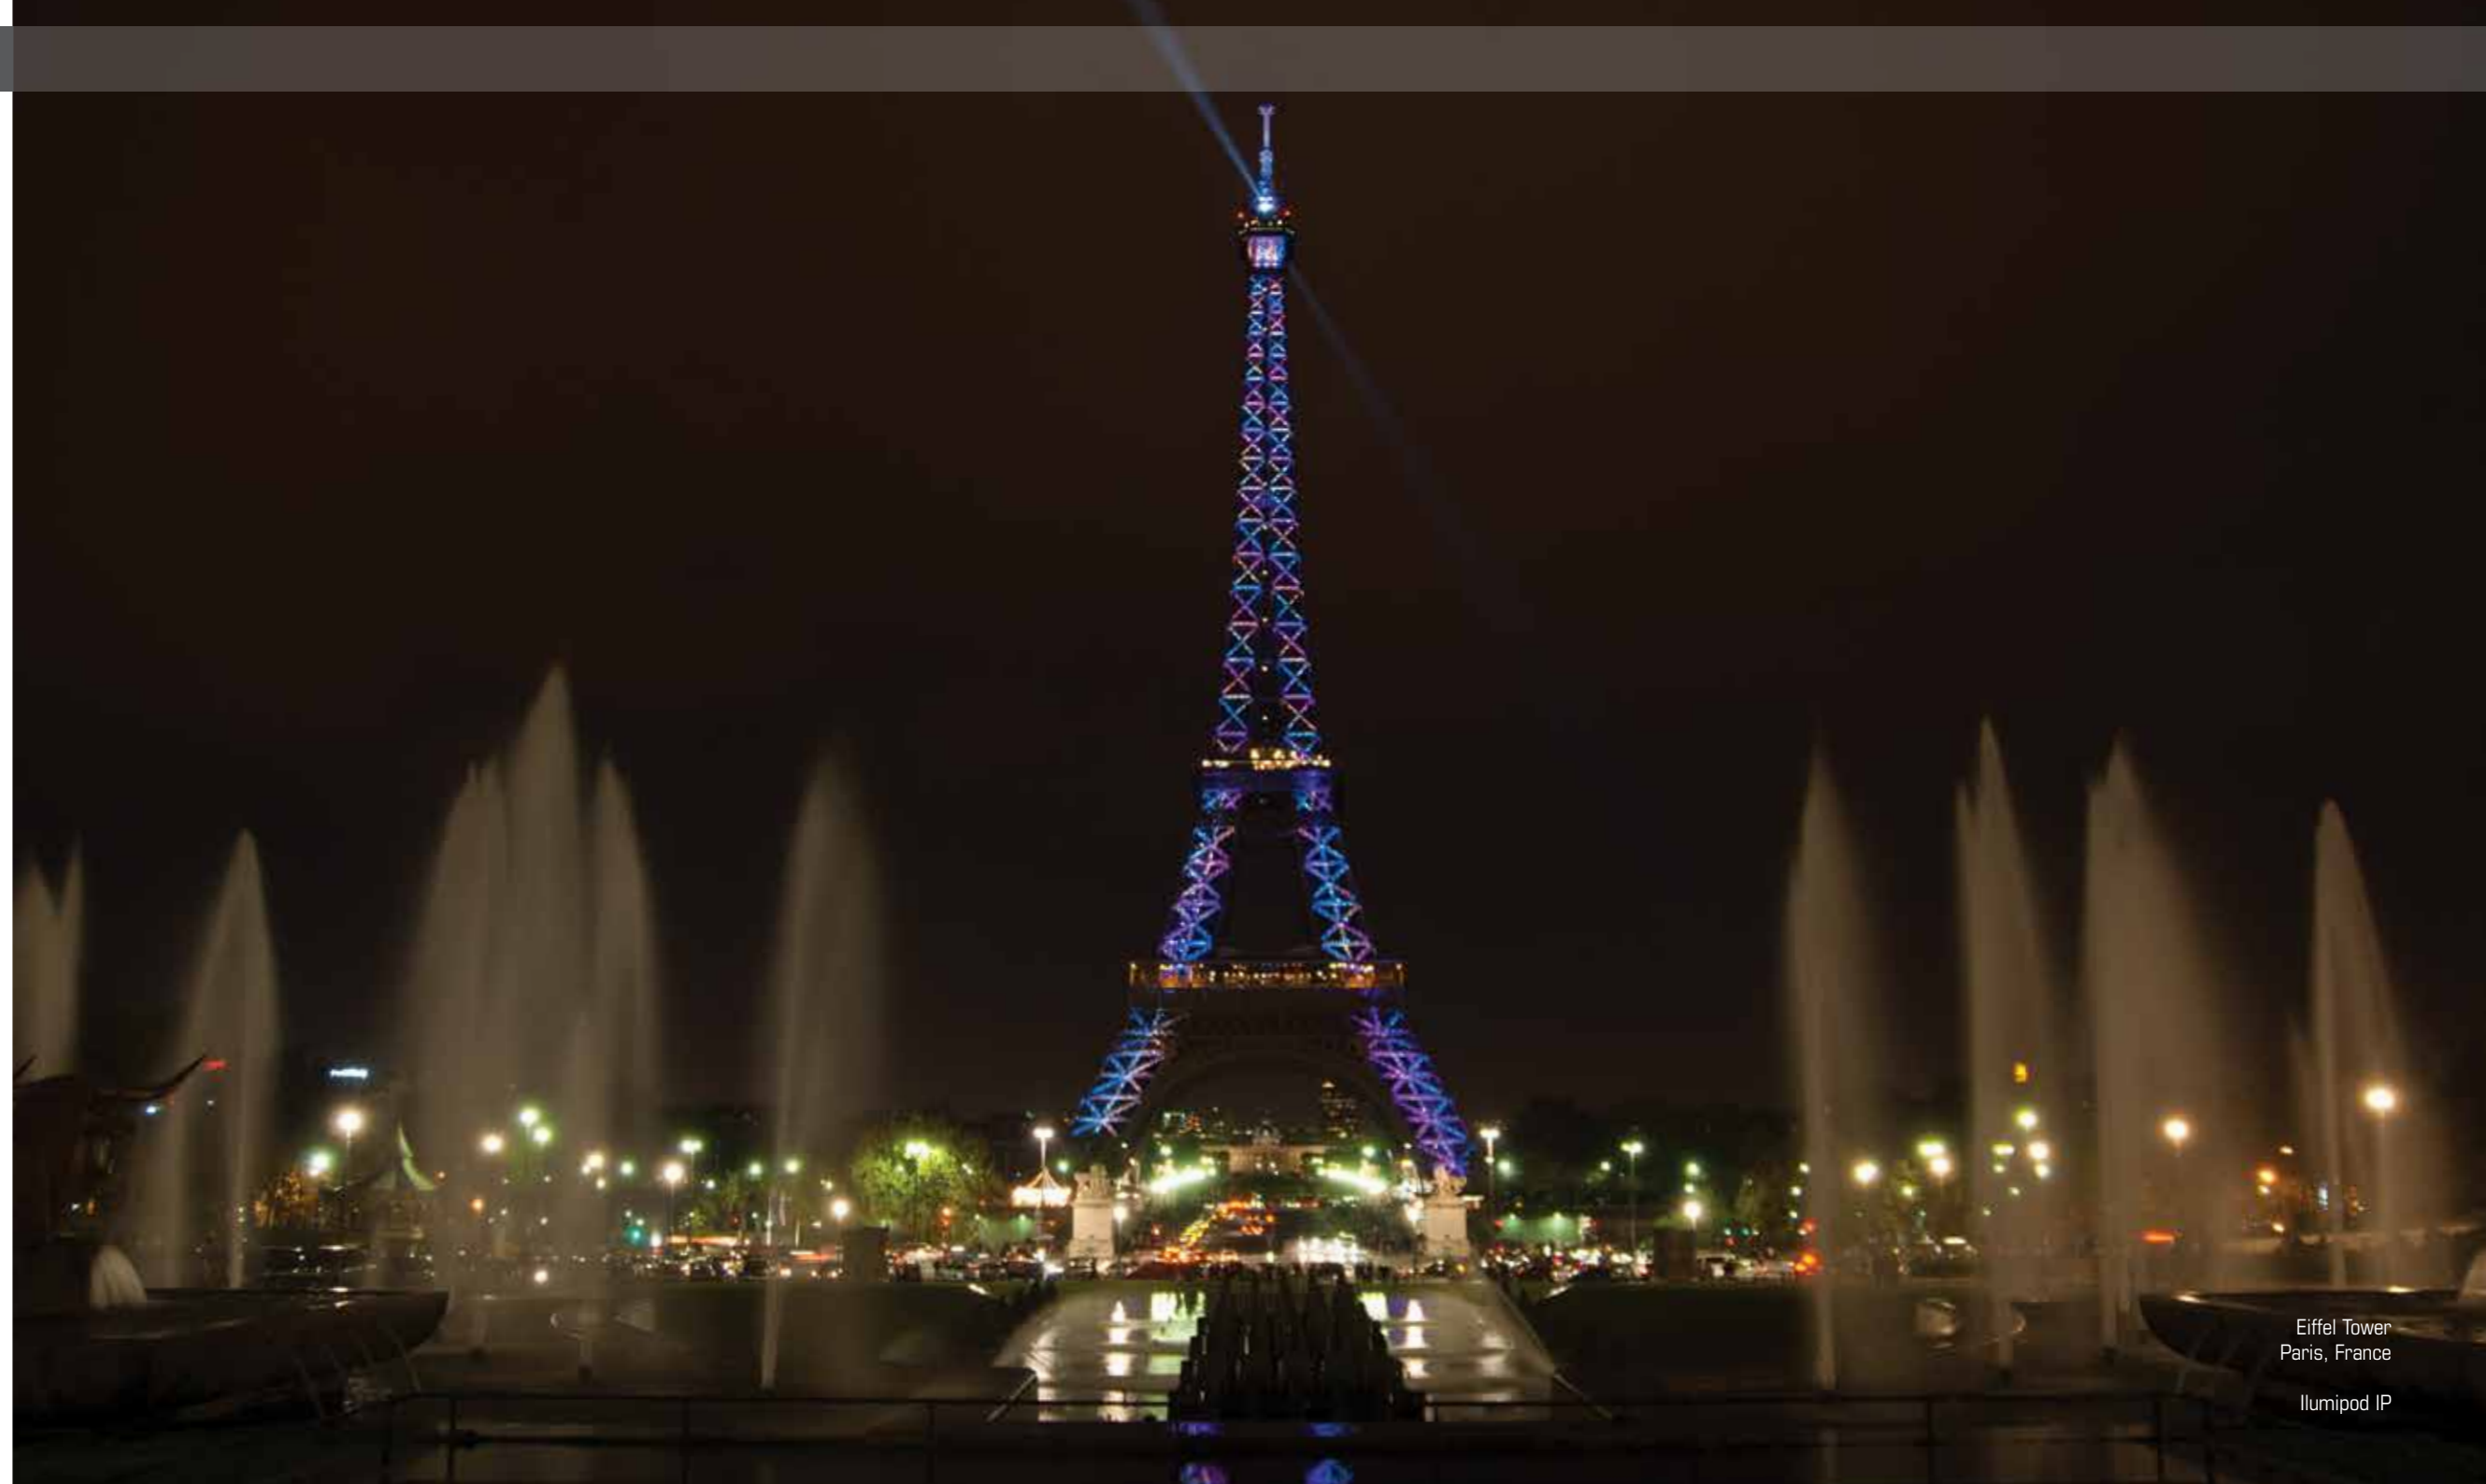

Eiffel Tower
Paris, France

Illumipod IP



Drai's Beach Club
Las Vegas

Colorist Pod 18QA



Shown with removable ground spike.

Source	1 (10 W) Quad-color RGBA LEDs, 50,000 hours
Beam Angle	13°
Field Angle	24°
Illuminance	225 lux @ 5 m
Lumens	229
Control Channels	DMX: 1, 4, 5, 6, 7 or 10
RDM Functions	Address, Personality, Temperature Monitor
Dimensions	174 x 104 x 163 mm
Weight	1.6 kg
Certification	CE, MET
Environment	IP65, wet location
Optional Cables	IP5 Power, and IP5 Sig extension cables (See page 131)
Remote Addressing	CHAUVET Professional RDM2go (See page 129)

COLORIST POD 1Qa



Source	7 (15 W) Quad-color RGBA LEDs, 50,000 hours
Beam Angle	16°
Field Angle	27°
Illuminance	880 lux @ 5 m
Lumens	1,176
Control Channels	DMX: 4, 6 or 10
Dimensions	260 x 130 x 265 mm
Weight	4.9 kg
Certification	CE, MET
Environment	IP65, wet location
Optional Cables	IP5 Power, and IP5 Sig extension cables (See page 131)

COLORIST POD 7Qa



Source	18 (15 W) Quad-color RGBA LEDs, 50,000 hours
Beam Angle	16°
Field Angle	27°
Illuminance	2,232 lux @ 5 m
Lumens	2,854
Control Channels	DMX: 4, 6 or 10
Dimensions	140 x 337 x 337 mm
Weight	6.8 kg
Certification	CE, MET
Environment	IP65, wet location
Optional Cables	IP5 Power, and IP5 Sig extension cables (See page 131)

COLORIST POD 18Qa

Source	6 (15 W) Quad-color RGBA LEDs, 50,000 hours
Beam Angle	16°
Field Angle	27°
Illuminance	781 lux @ 5 m
Lumens	948
Control Channels	DMX: 4, 6, 10, 24 or 29
Dimensions	7.9 x 19.5 x 7.4 in (200 x 495 x 188 mm)
Weight	11.8 lb (5.4 kg)
Certification	CE, MET
Environment	IP65, wet location
Optional Cables	IP5 Power, and IP5 Sig extension cables (See page 131)

COLORIST LINE 6Qa



Source	12 (15 W) Quad-color RGBA LEDs, 50,000 hours
Beam Angle	16°
Field Angle	27°
Illuminance	1,382 lux @ 5 m
Lumens	1,811
Control Channels	DMX: 4, 6, 10, 48 or 53
Dimensions	7.9 x 39 x 7.4 in (200 x 990 x 188 mm)
Weight	19.6 lb (8.9 kg)
Certification	CE, MET
Environment	IP65, wet location
Optional Cables	IP5 Power, and IP5 Sig extension cables (See page 131)

COLORIST LINE 12Qa



Source	8 (15 W) Quad-color RGBA LEDs, 50,000 hours
Beam Angle	16°
Field Angle	27°
Illuminance	1,005 lux @ 5 m
Lumens	1,242
Control Channels	DMX: 4, 6 or 10
Dimensions	114 x 322 x 235 mm
Weight	5.3 kg
Certification	CE, MET
Environment	IP65, wet location
Optional Cables	IP5 Power, and IP5 Sig extension cables (See page 131)

COLORIST PANEL 8Qa

Source	36 (15 W) Quad-color RGBA LEDs, 50,000 hours
Beam Angle	16°
Field Angle	27°
Illuminance	5,070 lux @ 5 m
Lumens	5,206
Control Channels	DMX: 4, 6 or 10
Dimensions	230 x 593 x 338 mm
Weight	z16.6 kg
Certification	CE, MET
Environment	IP65, wet location
Optional Cables	IP5 Power, and IP5 Sig extension cables (See page 131)

COLORIST PANEL 36Qa



ILUMINARC

Sense. Sight. Soul.

STAY CONNECTED



