

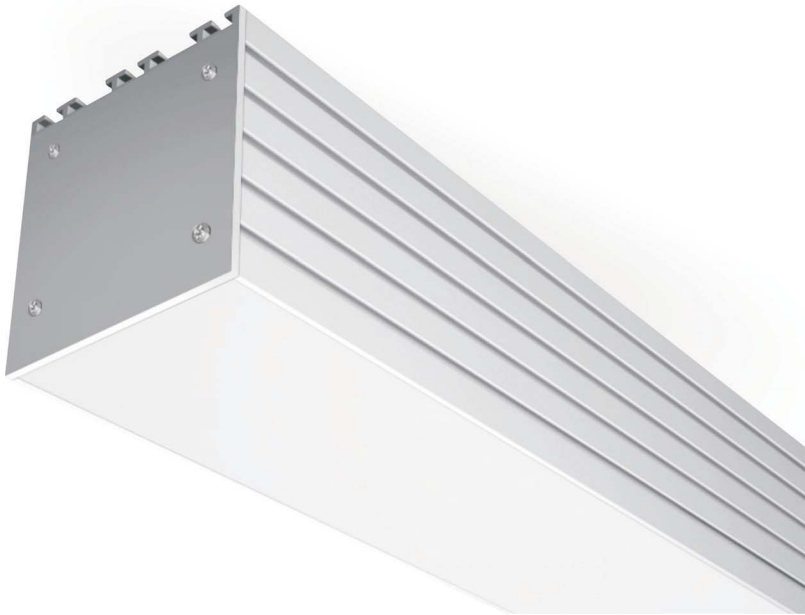


# TETRA PLUS TUNABLE

- Linear LED lighting surface, with hinge, recessed, trimless or pendant.
- Linear Tunable White system with adjustable colour temperature from 3,000 to 6,000 K at constant luminous flux.
- Low tolerances for colour temperature (MacAdam 4).
- Lumen maintenance L80/B50 50.000h
- IP30




Model	Luminaire Colour	Colour Temperature	CRI	Type	Watt / Length / Lumen	Initial LED (no cover)	Voltage
<b>TETRA PLUS TUNABLE SURFACE</b> <i>(TETRA PLUS TS)</i>							
<b>TETRA PLUS TUNABLE SURFACE with HINGE</b> <i>(TETRA PLUS TH)</i>					<i>(20W086)</i> 20W / 86cm / 2100lm <i>(26W114)</i> 26W / 114cm / 2650lm <i>(32W142)</i> 32W / 142cm / 3350lm		
<b>TETRA PLUS TUNABLE RECESSED</b> <i>(TETRA PLUS TR)</i>	<i>(AN)</i> Anodized <i>(WH)</i> White <i>(BL)</i> Black	<i>(AD)</i> 3000-6000K Adjustable	<i>(80)</i> ≥ 80	<i>(TR)</i> Transparent <i>(MS)</i> Milky Satin	<i>(40W086)</i> 40W / 86cm / 4300lm <i>(52W114)</i> 52W / 114cm / 5700lm <i>(62W142)</i> 62W / 142cm / 7150lm		<i>(230)</i> 230VAC DALI DIMMABLE
<b>TETRA PLUS TUNABLE TRIMLESS</b> <i>(TETRA PLUS TT)</i>							
<b>TETRA PLUS TUNABLE PENDANT</b> <i>(TETRA PLUS TP)</i>							





Ordering Code Example:  
TETRA PLUS TR - AN - AD - 80 - MS - 40W086 - 230

- Linear LED lighting surface, with hinge, recessed, trimless or pendant.
- Linear Tunable White system with adjustable colour temperature from 3,000 to 6,000 K at constant luminous flux.
- Low tolerances for colour temperature (MacAdam 4)
- Lumen maintenance L80/B50 50.000h
- 3 hours EMERGENCY operation
- IP30

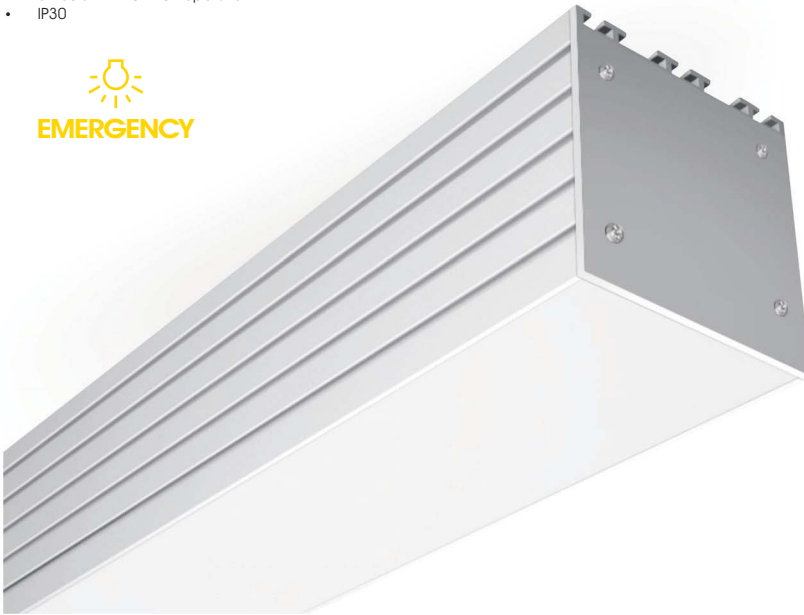

Model	Luminaire Colour	Colour Temperature	CRI	Type	Watt / Length /	Initial LED Lumen (no cover)	Voltage
<b>TETRA PLUS TUNABLE EM SURFACE</b> <i>(TETRA PLUS EM TS)</i>							
<b>TETRA PLUS TUNABLE EM SURFACE with HINGE</b> <i>(TETRA PLUS EM TH)</i>							
<b>TETRA PLUS TUNABLE EM RECESSED</b> <i>(TETRA PLUS EM TR)</i>	(AN) Anodized (WH) White (BL) Black	(AD) 3000-6000K Adjustable	(80) ≥ 80	(TR) Transparent (MS) Milky Satin	(32W/142) 32W / 142cm / (62W/142) 62W / 142cm /	3350lm 7150lm	(230) 230VAC DALI DIMMABLE
<b>TETRA PLUS TUNABLE EM TRIMLESS</b> <i>(TETRA PLUS EM TT)</i>							
<b>TETRA PLUS TUNABLE EM PENDANT</b> <i>(TETRA PLUS EM TP)</i>							









Ordering Code Example:

TETRA PLUS EM TR - AN - AD - 80 - MS - 62W/142 - 230

# TETRA PLUS

- Linear LED lighting surface, with hinge, recessed, trimless or pendant.
- IP30

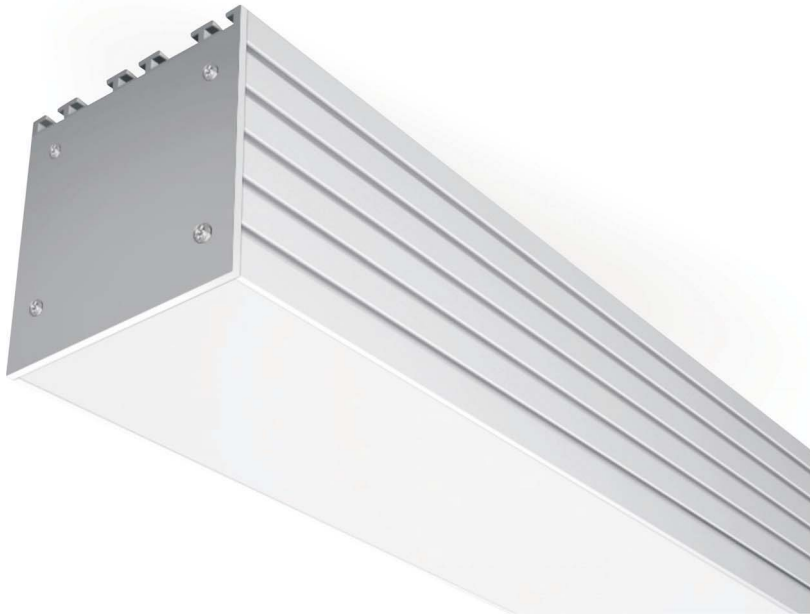

- 578 x 81mm
- 858 x 81mm
- 1138 x 81mm
- 1418 x 81mm
- 1698 x 81mm
- 1978 x 81mm

Model	Luminaire Colour	CRI	Type	Voltage	Colour Temperature*	Watt / Length / Initial LED Lumen (no cover)
<b>TETRA PLUS SURFACE</b> (TETRA PLUS SF)					(30) 3000K	(16W057) 16W / 57cm / 2060lm
<b>TETRA PLUS SURFACE with HINGE</b> (TETRA PLUS SH)						(24W085) 24W / 85cm / 3090lm
<b>TETRA PLUS RECESSED</b> (TETRA PLUS RC)	(AN) Anodized (WH) White (BL) Black	(80) ≥ 80	(TR) Transparent  (MS) Milky Satin	(230) 230VAC		(32W113) 32W / 113cm / 4120lm
<b>TETRA PLUS TRIMLESS</b> (TETRA PLUS TR)						(40W141) 40W / 141cm / 5150lm
<b>TETRA PLUS PENDANT</b> (TETRA PLUS PD)						(48W169) 48W / 169cm / 6180lm
					(40) 4000K	(56W197) 56W / 197cm / 7210lm
						(16W057) 16W / 57cm / 2240lm
						(24W085) 24W / 85cm / 3360lm
						(32W113) 32W / 113cm / 4480lm
						(40W141) 40W / 141cm / 5600lm
					(48W169) 48W / 169cm / 6720lm	
					(56W197) 56W / 197cm / 7840lm	

\*Available in 2700K, 3500K and 6500K upon request.  
\*\*Available in 230VAC DALI dimmable upon request.







Ordering Code Example:

TETRA PLUS RC - AN - 80 - TR - 230 - 40 - 32W113

### Available upon request:

- ✓ Custom dimensions
- ✓ Custom luminaire colours
- ✓ Emergency version

- 3 hours EMERGENCY operation
- Surface, Recessed, Trimless or Pendant.
- DALI dimmable upon request (except 32W113 model).
- Low tolerances for colour temperature (MacAdam 4)
- Lumen maintenance L80/B50 50.000h
- IP30

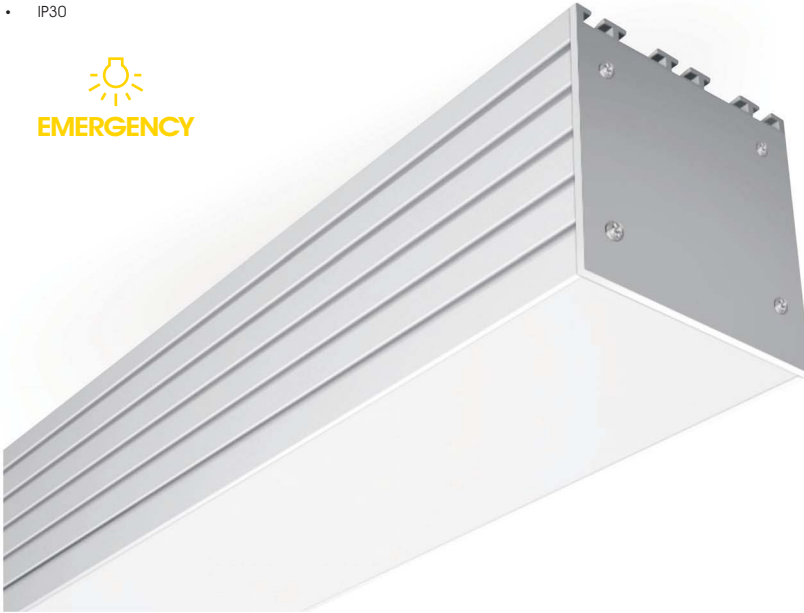

1138 x 81mm  
1418 x 81mm  
1698 x 81mm  
1978 x 81mm

Model	Luminaire Colour	CRI	Type	Voltage	Colour Temperature*	Watt / Length / Lumen (no cover)
<b>TETRA PLUS EM SURFACE</b> <i>(TETRA PLUS EM SF)</i>					(30) 3000K	(32W113) 32W / 113cm / 4120lm
<b>TETRA PLUS EM SURFACE with HINGE</b> <i>(TETRA PLUS EM SH)</i>				(40W141) 40W / 141cm / 5150lm		
<b>TETRA PLUS EM RECESSED</b> <i>(TETRA PLUS EM RC)</i>	(AN) Anodized (WH) White (BL) Black	(80) ≥ 80	(TR) Transparent (MS) Milky Satin	(230) 230VAC		(48W169) 48W / 169cm / 6180lm
<b>TETRA PLUS EM TRIMLESS</b> <i>(TETRA PLUS EM TR)</i>						(56W197) 56W / 197cm / 7210lm
<b>TETRA PLUS EM PENDANT</b> <i>(TETRA PLUS EM PD)</i>					(40) 4000K	(32W113) 32W / 113cm / 4480lm
						(40W141) 40W / 141cm / 5600lm
						(48W169) 48W / 169cm / 6720lm
						(56W197) 56W / 197cm / 7840lm

\*Available in 2700K, 3500K and 6500K upon request.

Ordering Code Example:

TETRA PLUS EM RC - AN - 80 - TR - 230 - 40 - 40W141